



L1

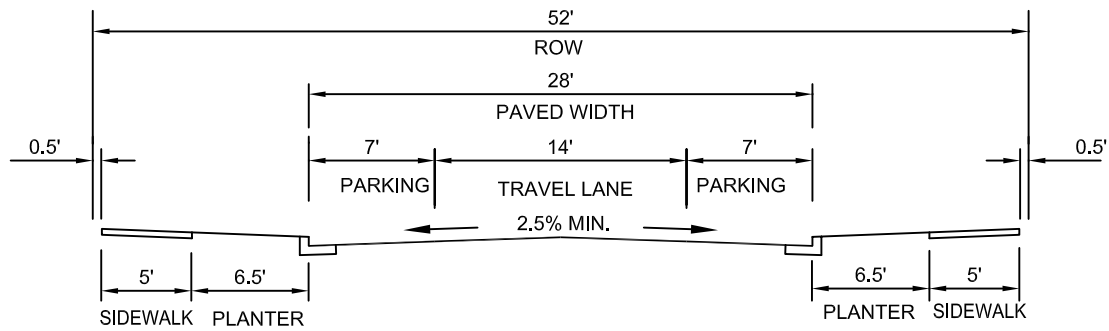

L2

FOR ADT OF ≤ 500 VEHICLES PER DAY

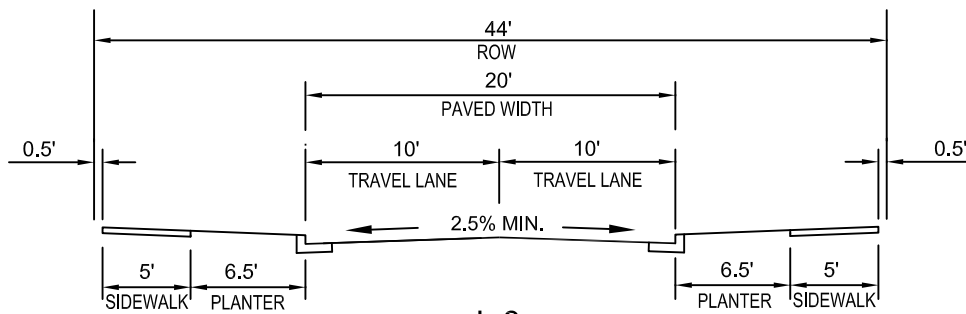

L3

NO PARKING

FOR ADT OF ≤ 500 VEHICLES PER DAY

NOTES:

1. A planter strip is required on all Local Streets.
2. Paved width and planter strip are measured to face of curb.
3. Provide 0.5 feet from right-of-way line to the back of sidewalk for maintenance and survey monument protection.
4. Street trees and street lights are required and shall be located within the planter strip.
5. For cul-de-sac requirements, see *Beaverton Standard dwg 110*.



City Of Beaverton

PUBLIC WORKS
DEPARTMENT

MINIMUM
LOCAL STREET WIDTHS

TRAFFIC ENGINEER
Randall R. Wooley

DATE
3 - 20 - 06

DRAWN BY
JR - CPD

DRAWING NO.
103